





ALUMA-BRAZE™

ALL-IN-ONE FLUX CORED ALUMINUM BRAZING ALLOY

Solidus: 800°F/427°C Liquidus: 900°F/482°C
.078" x 100" Approx. (1.9812mm x 2540mm)

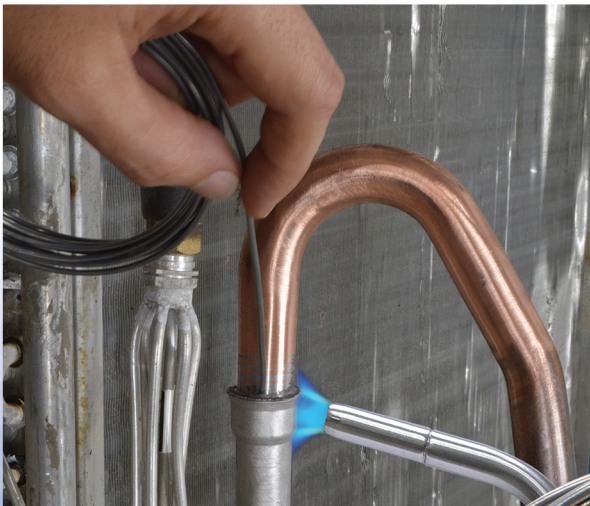

**ALUMINUM
TO COPPER
ALUMINUM
COIL
REPAIR**

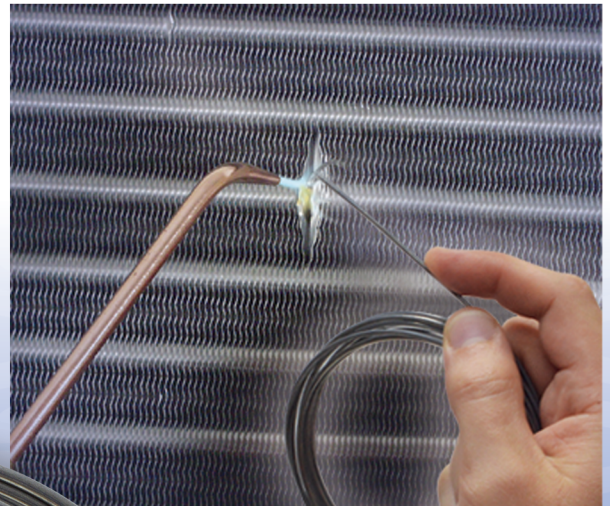

PART# UAB

- Cadmium free zinc-aluminum brazing filler metal
- Flux inner core means no manual flux application is required
- Low temperature self-fluxing alloy ideal for brazing aluminum to aluminum or aluminum to copper
- Applications include HVAC and Refrigeration repairs, patching holes in aluminum coils and brazing a copper to aluminum transition fitting

**CONTINUOUS
COIL PRODUCES
LESS WASTED
MATERIAL THAN
BRAZING RODS**



**Scan for
Product
Video**



UNIWELD PRODUCTS INC.
2850 RAVENSWOOD ROAD, FORT LAUDERDALE, FL 33312 U.S.A.
800.323.2111 • 954.584.2000 • Fax: 954.587.0109
email: info@uniweld.com • www.uniweld.com

