

UNIWELD SMARTeCH[®]

UVG2 DIGITAL VACUUM GAUGE

SPECIFICATIONS

- Range: 0-19,000 Microns, 2533.13 Pa, 25.3 mBar, 19 mmHg
- Resolution: 1 Micron (0-400), 10 Micron (400-3000), 100 Micron (3000-10000), 250 Micron (10000-19000)
- Temperature Compensated Self-Calibration
- Accuracy: +/- 10% or +/- 10 Micron
- Select from 8 different vacuum units: micron, inHg, Torr, psia, mbar, mTorr, Pa, kPa



- Operating Temperature: 0 °F to 140 °F / -17.8 °C to 60 °C
- Large, High-Visibility Backlit LCD Display
- Battery Life: Up to 300 Hours
- Battery Level Indicator
- Sensor Withstands Overpressure Up to 400 PSI
- Oil Filter Disk Prevents Sensor Contamination. Keeps your sensor clean and accurate!
- IP65 Rated Water Resistant Rubberized Housing
- Requires (3) AA Batteries - Not Included



Button			UNITS
Press and Release	Backlight On/Off	Power On/Off	Vacuum Units
Press Both	Enable Auto Off		

DISPLAY

- Battery Level Indicator
- Pressure Value
- Auto Off
- Vacuum Units

Work smarter with Uniweld's SmartTech Digital Vacuum Gauge...
Unexpectedly More!



Display Package

2850 Ravenswood Road • Fort Lauderdale • FL 33312 U.S.A.
Customer Service: 800.323.2111 • 954.584.2000 • Fax: 954.587.0109
info@uniweld.com • www.uniweld.com

FY0095 / 0521

VALVE CORE TOOLS

VACUUM
RATED TO
20
MICRONS

- Vacuum Rated to 20 Microns
- Remove and replace valve cores without losing the system's refrigerant charge
- Temporarily remove valve cores for unrestricted flow, providing faster recovery, evacuation, and charging the system with refrigerant
- Optional 1/4" side port to attach and isolate a vacuum gauge at the system



92825 1/4" VALVE CORE REMOVAL TOOL


92838 1/4" VALVE CORE REMOVAL TOOL WITH 1/4" SIDE PORT FITTING

92867 5/16" R-410A MINI SPLIT VALVE CORE REMOVAL TOOL

92868 5/16" R-410A MINI SPLIT VALVE CORE REMOVAL TOOL WITH 1/4" SIDE PORT FITTING

MAXEVAC™ KIT

- Vacuum Rated to 20 Microns
- Temporarily remove valve cores for unrestricted flow, providing faster recovery, evacuation, and charging the system with refrigerant.
- Includes 1/4" side port to attach and isolate a vacuum gauge at the system
- Includes 6" service hose to connect vacuum gauge to 1/4" side port

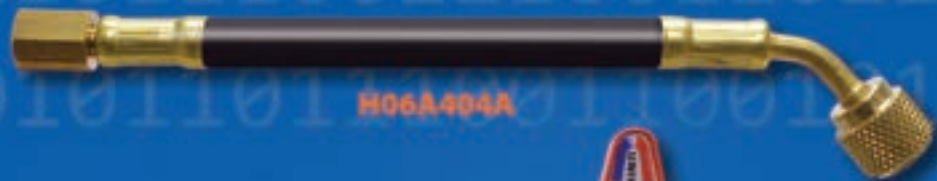

H06A404A



92825



92838

92823 1/4" MAXEVAC KIT INCLUDES ONE OF EACH: 92825, 92838, H06A404A

92869 5/16" MAXEVAC KIT INCLUDES ONE OF EACH: 92867, 92868, H06A404A

H06A404A 6" VACUUM GAUGE SERVICE HOSE, 1/4" F.F. X L45



2850 Ravenswood Road • Fort Lauderdale • FL 33312 U.S.A.
Customer Service: 800.323.2111 • 954.584.2000 • Fax: 954.587.0109
info@uniweld.com • www.uniweld.com