

QUALITY TOOLS THAT GO TO WORK WITH YOU®



**LIGHTWEIGHT!**

# UVP1.5 VACUUM PUMP

**POWERFUL!**

**COOLER  
RUNNING!**

WIDE MOUTH  
OIL PORT AND  
PUMP EXHAUST

CENTER MOUNTED  
HANDLE FOR BALANCE

DUAL INTAKE FITTING  
1/4" FLARE & 1/2" ACME  
WITH  
TETHERED CAPS

LARGE  
CAPACITY OIL  
RESERVOIR

POWERFUL  
LOW DECIBEL  
FAN COOLED  
MOTOR

LARGE  
SIGHT GLASS  
FOR EASY OIL  
MONITORING

MOTOR  
AIR VENT

EASY ACCESS  
OIL DRAIN

MOLDED PLASTIC BASE  
WITH RUBBER FEET FOR  
DURABILITY AND  
VIBRATION CONTROL

WIDE, STABLE  
FOOTPRINT

**UVP1.5-110**  
**UVP1.5-220**

**TWO STAGE  
FOR  
DEEP VACUUM!**




**UNIWELD®**  
PRODUCTS, INC.  
FT. LAUDERDALE  
FL 33312 U.S.A.  
www.uniweld.com



# UVP1.5 VACUUM PUMP



UniWeld's high performance UVP Vacuum Pump has been designed and engineered to provide you with reliable service and the latest in vacuum pump technology. The UVP 1.5 pump is built for deep vacuum service on appliances, A/C, automotive and commercial systems using CFC, HCFC and HFC refrigerants in conjunction with mineral oil, ester oil, alkybenzene oil and PAG oil as lubricants.

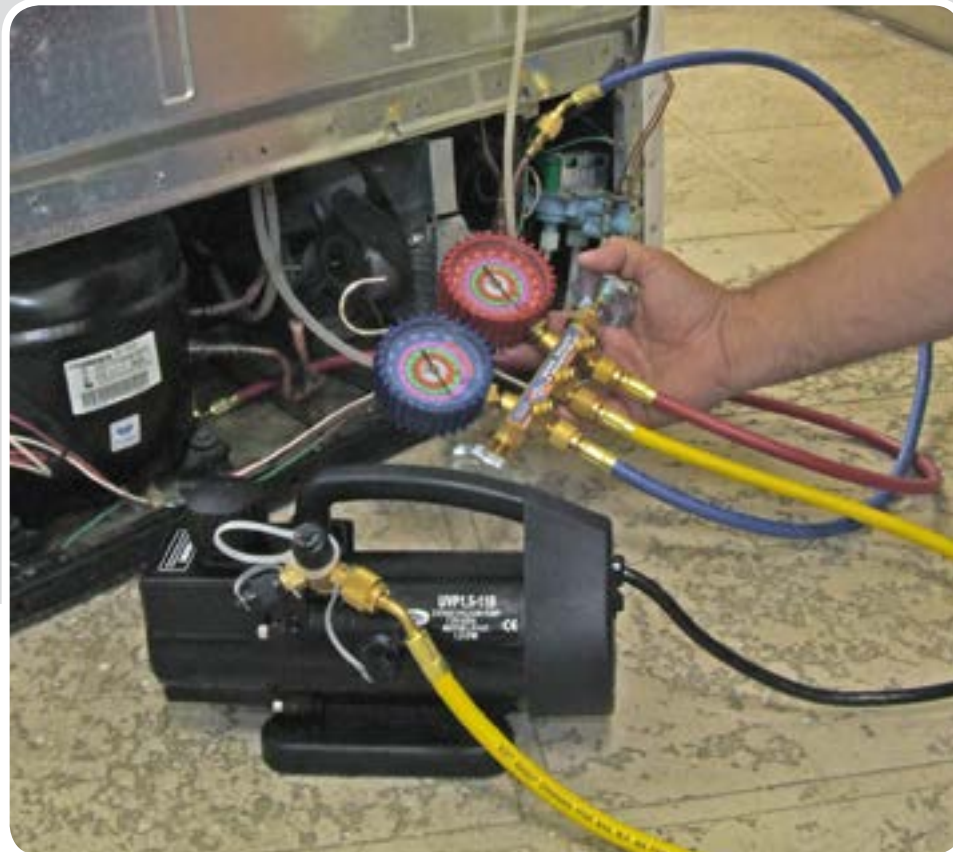

**Part#s:**  
**UVP1.5-110**  
UPC 42170  
**UVP1.5-220**  
UPC 42169

Pump Specifications	UVP1.5
Free Air Displacement	1.5 CFM, 40.5 liter/min.
Number of Stages	2-Stage Rotary Vane
Field Micron Rating	38 Microns
Intake Fittings	1/4" Male Flare & 1/2" Acme
Thermal Overload Protection	1/4 HP
Voltage	110/220V - 50/60Hz
Oil Capacity	4.7 Ounces (140 ml)
Power Cord	72" (1.83m)
Dimensions	10.23" x 3.50" x 6.40" 26 cm x 9 cm x 16.5 cm
Weight	10 Lbs. (4.54 kg)
Shipping Weight	14 Lbs. (6.35 kg)
Color	Black



**USE ONLY  
PREMIUM UNIWELD  
VACUUM PUMP OIL**  
Available in Quarts  
(.946 liter) 12 per case  
#42005 and  
Gallons (3.78 liters)  
6 per case #42006



**UNIWELD PRODUCTS, INC.**  
2850 Ravenswood Road, Fort Lauderdale, FL 33312  
Customer Service: 800.323.2111 • 954.584.2000  
www.uniweld.com • info@uniweld.com